

BDS/BDR Series



Features

- Low profile design, offering easy pivoting
- Dual ball raceways protected by dust cap
- Heat treated
- High luster chrome finish
- Precision bearing wheels for ultimate mobility
- Full thread guards on all 2-1/2" models

Applications

- Theatrical Equipment
- Computer Frames
- Electronic Enclosures
- Copy Machines
- Business Machines
- Medical Equipment
- Fixtures and Displays

Coming Soon

- Optional fastenings available by special order. Please contact the factory for further assistance.

Wheel Selection



Neoprene Donut
(2" models)



Neoprene Flat
(2-1/2" models)



Glass Filled Nylon
(2" model)




Glass Filled Nylon
(2-1/2" model)



Threaded Stem Models

Wheel Dia.	Tread Width*	Tread Type	Thread Guards	Bearing Type	Dynamic Load	Mounting Height	Swivel Radius	Part Number	Fastening Selection
2"	1"	Neoprene (Donut)	None	Precision	300 lbs	3-13/16"	2-1/4"	BDS20 BC-NPR31(KK)	741,748,824,825
	1"	Glass Filled Nylon	None	Precision	400 lbs	3-13/16"	2-1/4"	BDS20 BC-GFN31(KK)	741,748,824,825
2 1/2"	1"	Neoprene (Flat)	Full	Precision	300 lbs	3-3/4"	2-1/2"	BDS25 BC-NPR33(KK)	741,748,824,825
	1"	Glass Filled Nylon	Full	Precision	400 lbs	3-3/4"	2-1/2"	BDS25 BC-GFN31(KK)	741,748,824,825

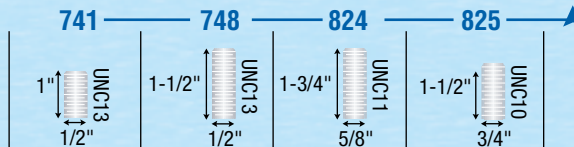


*Each wheel.

BDS/BDR Series



Swivel Top Plate Models

Wheel Dia.	Tread Width*	Tread Type	Thread Guards	Bearing Type	Dynamic Load	Mounting Height	Swivel Radius	Part Number	Fastening Selection
2"	1"	Neoprene (Donut)	None	Precision	300 lbs	3-5/16"	2-1/4"	BDS20142BC-NPR31(KK)	142
	1"	Glass Filled Nylon	None	Precision	400 lbs	3-5/16"	2-1/4"	BDS20142BC-GFN31(KK)	142
2 1/2"	1"	Neoprene (Flat)	Full	Precision	300 lbs	3-7/8"	2-1/2"	BDS25142BC-NPR33(KK)	142
	1"	Glass Filled Nylon	Full	Precision	400 lbs	3-7/8"	2-1/2"	BDS25142BC-GFN31(KK)	142




*Each wheel.



Rigid Top Plate Models

Wheel Dia.	Tread Width*	Tread Type	Thread Guards	Bearing Type	Dynamic Load	Mounting Height	Swivel Radius	Part Number	Fastening Selection
2"	1"	Neoprene (Donut)	None	Precision	300 lbs	3-5/16"	N/A	BDR20142BC-NPR31(KK)	142
	1"	Glass Filled Nylon	None	Precision	400 lbs	3-5/16"	N/A	BDR20142BC-GFN31(KK)	142
2 1/2"	1"	Neoprene (Flat)	Full	Precision	300 lbs	3-7/8"	N/A	BDR25142BC-NPR33(KK)	142
	1"	Glass Filled Nylon	Full	Precision	400 lbs	3-7/8"	N/A	BDR25142BC-GFN31(KK)	142



*Each wheel.